


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	86		B1	REVISED PER ECO-11-024755	13DEC11	KH	DR

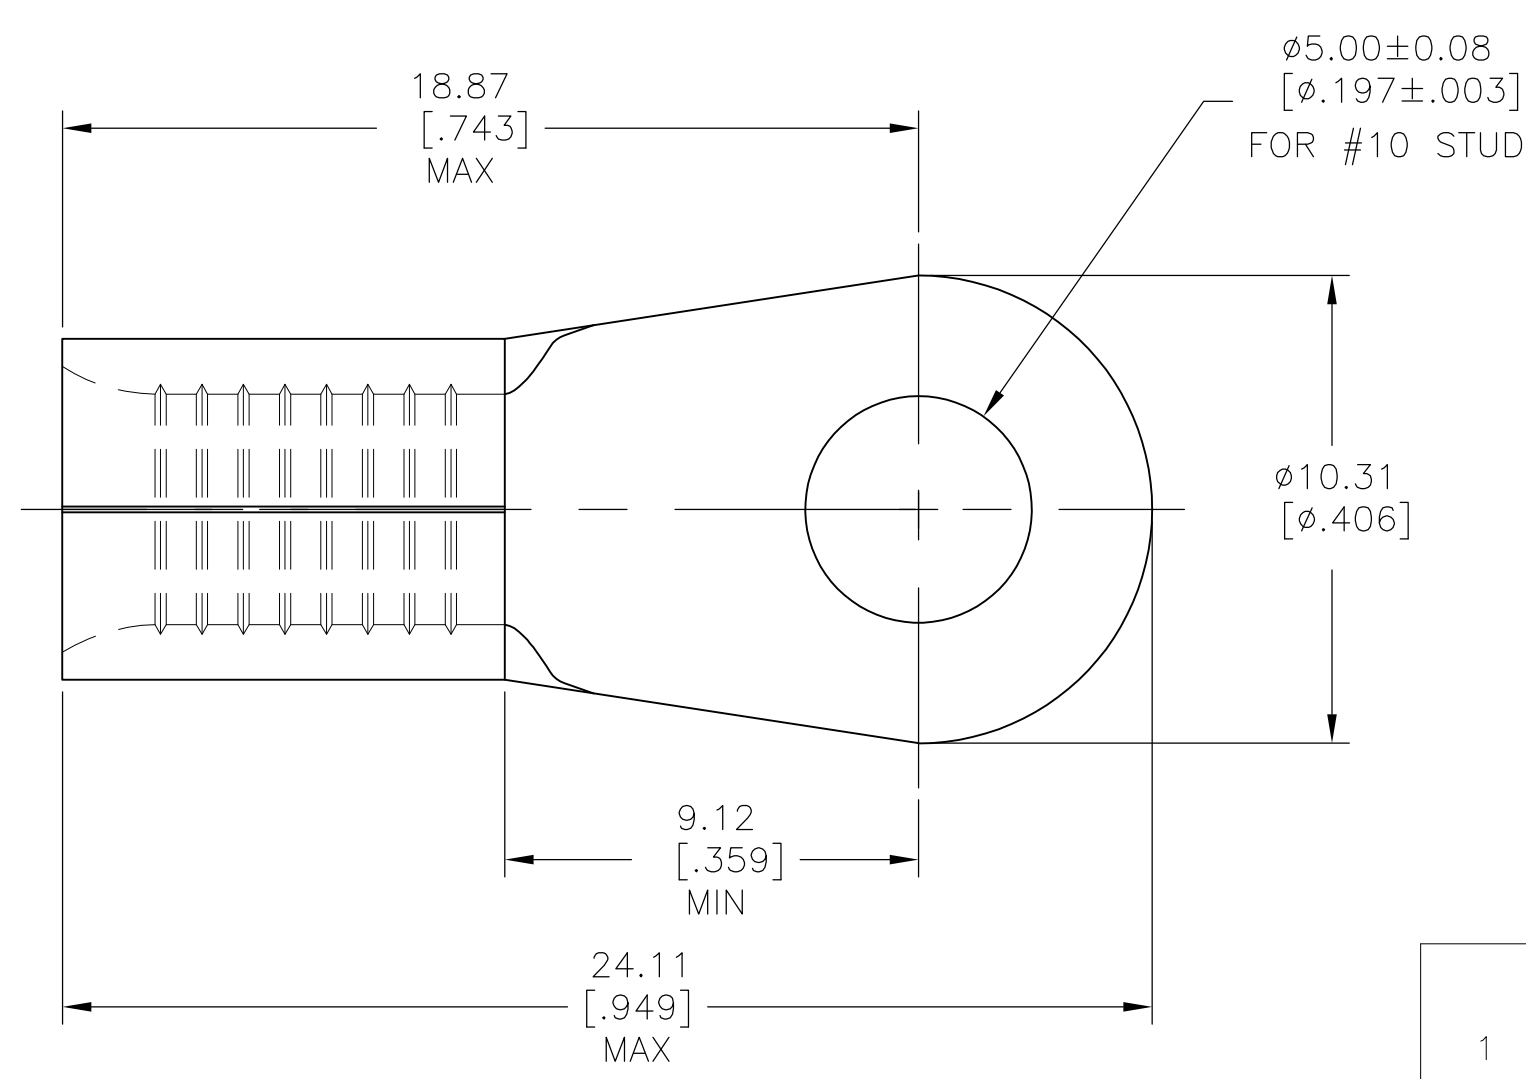

- 1 WIRE RANGE IS FOR #8 AWG STANDARD. WIRE CROSS SECTIONAL AREA RANGE: 13,100-20,800 CMA, STRANDED WIRE
- 2 THE TONGUE THK IS 1.22 ± 0.08 [$.048 \pm .003$]
- 3 RECOMMENDED OPERATING TEMP -55°C TO $+200^{\circ}\text{C}$ FOR HEAT SHRINK TUBING

1	8-1190141-0	HIGH AND LOW TEMPERTURE CROSS LINKED FLOUROPOLYMER HEAT SHRINK TUBING 9.525[.375]MIN IDX25.400±2.032[1.000±.080] RT555-3/8-0-SP
1	323165	TERMINAL BODY: COPPER PER ASTM B-152 ANNEALED FINISH: NICKEL PLATE .000300 MIN THK PER SAE AMS QQ-N-290
-1	PART NO	DESCRIPTION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 30JAN04	STE TE Connectivity	
		CHK MJ SPICER 08APR04		
DIMENSIONS: mm [INCHES]		APVD MJ SPICER 08APR04	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	HEAT RESISTANT TERMINAL KIT	
0 PLC ± -		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
1 PLC ± -			A3 00779 C-696633	
2 PLC ± -			SCALE 1:1 SHEET 1 OF 1 REV B1	
3 PLC ± 0.20[.008]				
4 PLC ± -				
ANGLES ± 1°				
MATERIAL		WEIGHT		
FINISH				
		CUSTOMER DRAWING		