

4831, solder terminal, insulated, 2-pole, Audio Plug/sockets, 2.5 mm



**Description**


- Solder terminal :  
for cable mounting
- Audio entrances and exits
- Data and Signal transfer
- Audio Plug: 2-pole , insulated , straight

**Technical Data**

Diameter	2.5 mm	Allowable Operation Temperature	-20 °C to 70 °C
Number of Poles	2-pole	Terminal	solder terminal nickel-plated
Ratings DC	0.5 A / 30 VDC	Housings	insulated
Ratings AC	0.5 A / 30 VAC	Style	straight
Dielectric Strength	500 VDC	Lifetime	5000 Insertions
Insulation Resistance	> 100 MΩ @ 500 VDC		


Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

**Dimensions**

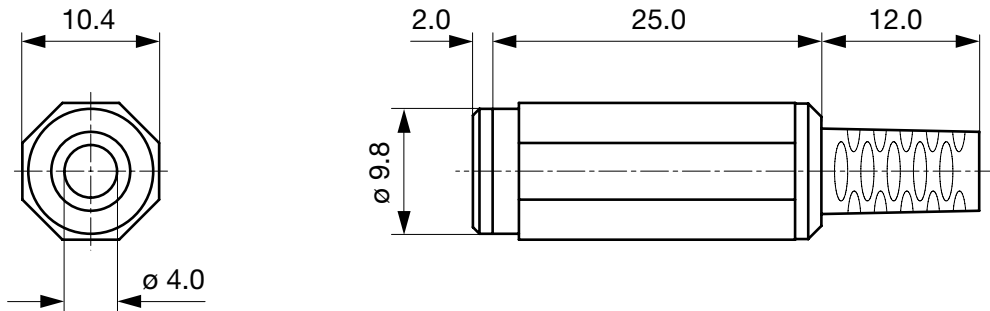

Cable diameter max. 4.0 mm

**Diagrams**



## All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
Audio Plug/Sockets	2.5	2-pole	solder terminal	4831.3200

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

**Packaging unit** 100 Pcs

## Mating Inlets/Plugs

### Category / Description

[Audio Plug/Sockets Overview complete](#)



4831, solder terminal, screened, 2-pole, Audio Plug/Sockets, 2.5 mm	4831.1200
4831, solder terminal, insulated, 2-pole, Audio Plug/Sockets, 2.5 mm	4831.1210
4831, solder terminal, insulated, 2-pole, Audio Plug/Sockets, 2.5 mm	4831.1220

[Audio Plug/Sockets further types to 4831.3200](#)