SRW012US

12U Wall-Mount Pivoting 2-Post Open Frame Rack







150 lb. Load Rating



Accommodates Standard 19-inch Equipment




Construction



B Equipment Mounting Frame (1) Pivots for easy rear access to equipment and cabling.

Threaded (#12-24) Mounting Holes

Also Includes: Owner's manual, mounting template (1), pivot bearings (2), T bolts (2), washers (4), M10 locknuts (2), lock pins (2) and rackmount equipment mounting hardware (24 #12-24 screws).

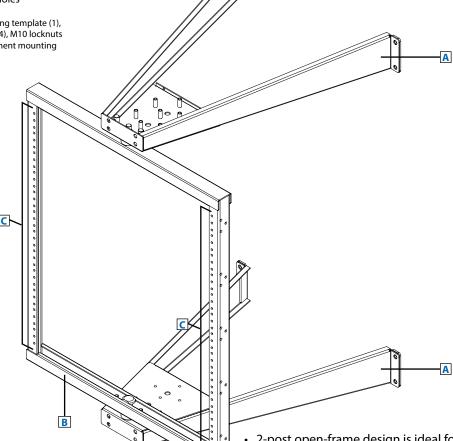





Specifications	Electronic Industries Alliance
Model	SRWO12US
Rack Spaces	12U
Equipment Mounting Depth	18 in. (452 mm)
Load Rating*	150 lb. (68 kg)
Unit Dimensions (H x W x D)	31.04 x 19.76 x 20.35 in. (788.42 x 502 x 517 mm)
Shipping Dimensions (H x W x D)	4.1 x 24.4 x 20.1 in. (104.1 x 619.8 x 510.5 mm)
Unit Weight	15 lb. (6.8 kg)
Shipping Weight	18 lb. (8.2 kg)
Standards	Meets EIA/ECA-310-E, IEC 60297-3-100, GOST,
	NOM (Mexico) and RoHS standards

* The load rating includes the combined weight of the unit and installed equipment. The unit must be mounted to a stable surface with user-supplied anchors capable of bearing the full load.


Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

- 2-post open-frame design is ideal for IT environments that do not require a lockable enclosure cabinet
- Ships disassembled for easy transport and assembly in tight spaces
- Threaded (#12-24) mounting holes enable fast equipment mounting
- · Pivots to allow easy rear access to equipment and

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

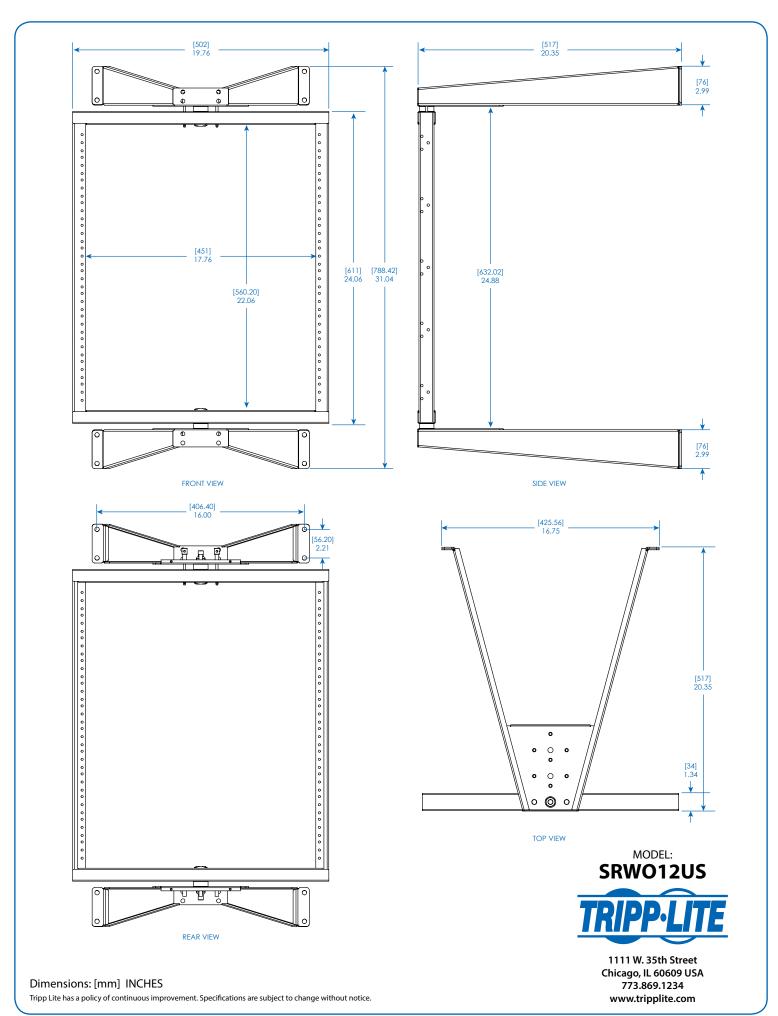

Copyright © 2016 Tripp Lite.