
	ت م		т	т	τ	D	0	
4		N Thread					Image: state stat	TXA
			Keying Shown as exa	mple				
	CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III			Connector dimension				
2	-Shell Material: Aluminium-Shell Plating: Olive drab Cadmium-Insulator: Thermoplastic-Contacts: Copper Alloy-Seals & Grommet: Silicon Elastomer-Contact Plating: Gold over copper Allog-Durability: 500 Mating cycles-Delivered with Souriau contacts and Accessorie-Temperature Range: -65°C to +175°C-Salt Spray: 500 hours-Mass: 14.7 g ± 10%		VV	ØS 25 M Z 31 N THREAD M15x	Max	A 18-10-20 ISS DATE Designed By:	SOURIAU shall not be liable for and due to a use of the Products wh the Specifications issued by either of (professional recommendat Countr FR D16 First Release Latest modification - by Date:	hicl of th tion ry
_ _	BASIC SERIES: 8D 5 SHELL TYPE : Plug with RFI Shielding 5 CONTACT TYPE : Standard Crimp Contact 5 SHELL SIZE : 11 11 PLATING : W = Olive drab Cadmium 6	11 W 98	P D		ORIENTATION : D E : PIN(500 Matings) ACT LAYOUT : 11-98	TITLE SCALE NA SOURIA FORMAT A3	Alumin General linear Tolerances: ± U WWW.SOURIAU.C SOURIAU 8D511W C	

σ	Þ						
		4					
SEXAMPLE		3					
any non-conformity or damage which does not comply with r of the Parties or by a third party dation, technical notice.) ntry Jurisdiction & Control List R Not Listed							
CUSTOMER DRAWING							
inium Plug 8D series							
r	NPRDS / PROJECT 859						
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
U DRG N° N98PD-C	SHEET 1/2						
BA							

	Ŧ	۵	г	m	D	0
4	-x	Contact Layout $A \oplus B \oplus B \oplus C \oplus C$				
	Shell Arrangement Numbu size no. conta 11 -98 6	+ 000 (0.00) +.130 (3.30) + 130 (3.30) +.000 (0.00) + 130 (3.30) +.000 (0.00) + 0.65 (1.65) 113 (2.87) 055 (1.65) 113 (2.87) 130 (3.30) +.000 (0.00) + .000 (0.00) +.000 (0.00) + .000 (0.00) +.000 (0.00)				
ယ						
	-					SOURIAU shall not be liable for ar due to a use of the Products w the Specifications issued by either o (professional recommenda Count
2					A 18-10-201	FR PN: 8D511 I6 First Release
					ISS DATE Designed By: TITLE SCALE	Latest modification - by Date: Alumin General linear
-						SOURIAU
	Н	G	F	E	A3 D	8D511W
					V	

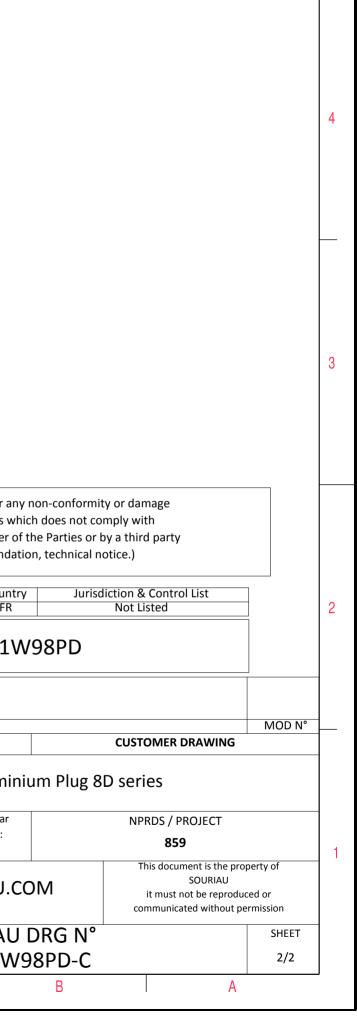

 \triangleright

σ