
| <b>T</b>  | Q  | т           | m                              |  |                 | 0                                 | σ                          | >                              |        |
|---|--|-------------|--------------------------------|--|-----------------|-----------------------------------|----------------------------|--------------------------------|--------|
|   |  |             |                                |  |                 |                                   |                            |                                |        |
| >   |  |             |                                |  |                 | LAYOUT SHOW                       | N AS EXAMPLE               |                                |        |
|   |  | Keying Sho  | own as example                 |  |                 |                                   |                            |                                |        |
| CHARACTERI  |  |             | Connector dimension            |  |                 |                                   |                            |                                |        |
|   | ed on MIL-DTL-38999 Series III   |             | Dim Nominal<br>ØS 25 Max       |  |                 |                                   |                            |                                |        |
| -Shell Material<br>-Shell Plating<br>-Insulator<br>-Contacts  | : Aluminium<br>: Olive drab Cadmium<br>: Thermoplastic<br>: Copper Alloy                   |             | Z 31 Max<br>VV THREAD M15x1-6g | 5  |                 | the Specifications issued by e    | ucts which does not comply | y with<br>third party          |        |
| -Seals & Grom   | net : Silicon Elastomer  | n minimum   |                                | L  |                 | F                                 |                            | on & Control List<br>ot Listed |        |
| -Contact Platir<br>-Durability  | -Contact Plating : Gold over copper Alloy 0.8μm minimum<br>-Durability : 500 Mating cycles |             |                                |  |                 | PN: 8D511W99AN                    |                            |                                |        |
| -Delivered wit  | Souriau contacts and Accessories   |             |                                |  |                 | PN: 805                           | TTAAAAN                    |                                |        |
| -Temperature  | •  |             |                                | А  | 18-10-2016      | First Release                     |                            |                                |        |
| -Salt Spray<br>- Mass   | : 500 hours<br>: 14.87 g ± 10%   |             |                                | ISS  | S DATE gned By: | Latest modification - by<br>Date: |                            | USTOMER DRAWING                | MOD N° |
|   |  |             |                                |  |                 |                                   | uminium Plug 8D s          |                                |        |
|   |  |             |                                |  |                 |                                   |                            |                                |        |
| BASIC SERIES:   | 8D 5 -<br>Plug with RFI Shielding  | 11 W 99 A N |                                |  | NA              | General I<br>Toleran              | ces:                       | NPRDS / PROJECT<br><b>859</b>  |        |
|   |  |             |                                |  |                 |                                   |                            | This document is the propert   | y of   |
| CONTACT TYPE       : Standard Crimp Contact       ORIENTATION : N         SHELL SIZE : 11       CONTACT TYPE : PIN(500 Matings) |  |             | 50                             | SOURIAU WWW.SOURIAU.COM<br>it must not be reproduced or<br>communicated without permission |                 |                                   |                            |                                |        |
|   | W = Olive drab Cadmium   |             |                                |  | DRMAT           | SUIR                              | IAU DRG N°                 |                                | SHEET  |
|   |  | I           |                                |  | 43              |                                   | 1W99AN-C                   |                                | 1/2    |

| -        | т  | ۵  | г | т |  | 0   |                    |
|----------|----|--|---|---|--|---|--------------------|
|          |    | Contact Layout   |   |   |  |   |                    |
| 4        | -8 | $ \begin{array}{c}                                     $   |   |   |  |   |                    |
|          |    | X-axis         Y-axis           (mm)         (mm)           A         +.065 (1.65)         +.113 (2.87)           B         +.130 (3.30)         +.000 (0.00)           C         +.065 (1.65)        113 (2.87)           D        065 (1.65)        113 (2.87)           E        130 (3.30)         +.000 (0.00)           F        065 (1.65)         +.113 (2.87) | ] |   |  |   |                    |
| ω        |    | itacts contacts rating location<br>7 20 I All MS20050-99   |   |   |  |   |                    |
|          | -  |  |   |   |  | SOURIAU shall not be liab<br>due to a use of the Pro  | ducts wh           |
| N        |    |  |   |   |  | the Specifications issued by<br>(professional recon   | ceither of mmendat |
|          |    |  |   |   |  | PN: 8D  | 511V               |
|          |    |  |   |   | A 18-10-20<br>ISS DATE<br>Designed By: | 16 First Release<br>Latest modification - by<br>Date: |                    |
|          |    |  |   |   | SCALE                                  |   | Alumin             |
| <u> </u> |    |  |   |   | NA                                     |   | ances:             |
|          |    |  |   |   | SOURIA                                 |   |                    |
|          |    |  |   |   | FORMAT<br>A3                           | SOU<br>8D5  | RIAU<br>11W        |
| L        | Н  | G  | F | E | D                                      | C   |                    |

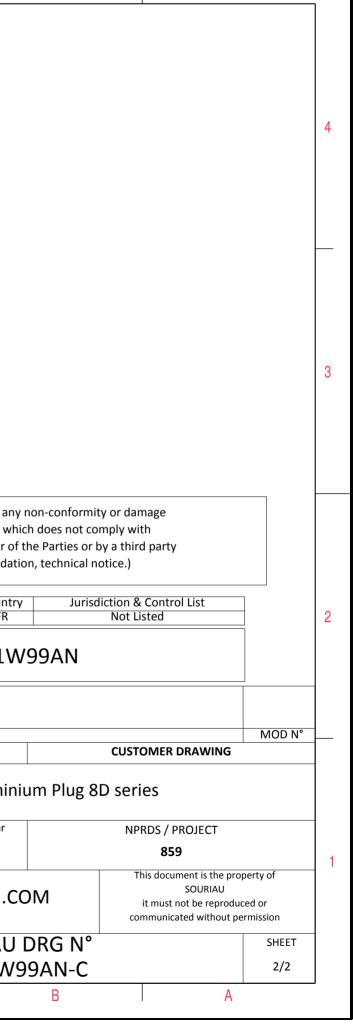

 $\triangleright$ 

σ