

ZWS 10

SPECIFICATIONS

A153-01-01D

| ITEMS | | MODEL | ZWS10-3 | ZWS10-5 | ZWS10-12 | ZWS10-15 | ZWS10-24 |
|-------|----------------------------------|-------|---------|---------------------------------------------------------------------------------------------------|---------------------------------------------|----------|----------|
| 1 | Nominal Output Voltage | V | 3.3 | 5 | 12 | 15 | 24 |
| 2 | Minimum Output Current | A | 0 | 0 | 0 | 0 | 0 |
| 3 | Maximum Output Current | A | 2.0 | 2.0 | 0.85 | 0.7 | 0.45 |
| 4 | Maximum Peak Output Current (*1) | A | 2.4 | 2.4 | 1.02 | 0.84 | 0.54 |
| 5 | Maximum Output Power | W | 6.6 | 10.0 | 10.2 | 10.5 | 10.8 |
| 6 | Maximum Peak Output Power (*1) | W | 7.92 | 12.0 | 12.24 | 12.6 | 12.96 |
| 7 | Efficiency (Typ) (*2) | % | 62 | 70 | 70 | 71 | 71 |
| 8 | Input Voltage Range (*3) | - | | 85 - 265VAC (47 - 440Hz) or 110 - 330VDC | | | |
| 9 | Input Current(Typ) | - | | 0.30A at 100VAC, 0.15A at 200VAC | | | |
| 10 | Inrush Current(Typ) | - | | 15A at 100VAC, 30A at 200VAC, Ta=25°C, Cold Start | | | |
| 11 | Output Voltage Range | - | | | +/-10% | | |
| 12 | Maximum Ripple & Noise (*10) | mV | 120 | 120 | 150 | 150 | 200 |
| | 0 - +60°C | mV | | | | | |
| | -10 - 0°C | mV | 160 | 160 | 180 | 180 | 200 |
| 13 | Maximum Line Regulation (*4,10) | mV | 20 | 20 | 48 | 60 | 96 |
| 14 | Maximum Load Regulation (*5,10) | mV | 40 | 40 | 96 | 120 | 150 |
| 15 | Maximum Temperature Drift (*6) | mV | 60 | 60 | 140 | 180 | 280 |
| 16 | Over Current Protection (*7) | - | | | 125% - | | |
| 17 | Over Voltage Protection (*8) | - | | | 140% - | | |
| 18 | Hold-up Time (Typ) (*2) | - | | 17ms at 100VAC, 10W, Ta=25°C | | | |
| 19 | Parallel Operation | - | | | - | | |
| 20 | Series Operation (*9) | - | | | Possible | | |
| 21 | Operating Temperature (*11) | - | | -10°C - +50°C : 100%, +60°C : 70% | | | |
| 22 | Operating Humidity | - | | | 30 - 90%RH | | |
| 23 | Storage Temperature | - | | | -30°C - +85°C | | |
| 24 | Storage Humidity | - | | | 10 - 95%RH | | |
| 25 | Cooling | - | | | Convection Cooling | | |
| 26 | Withstand Voltage | - | | Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (100mA) for 1min | | | |
| 27 | Isolation Resistance | - | | More than 100MΩ at 25°C and 70%RH | Output - FG 500VDC | | |
| 28 | Vibration | - | | 10-55Hz (Sweep 1min) Less than 19.6m/s ² X,Y,Z 1h each | | | |
| 29 | Shock | - | | | Less than 196.1m/s ² | | |
| 30 | Safety | - | | Approved by UL60950-1,CSA60950-1,EN60950-1. | Built to meet DENAN | | |
| 31 | Conducted Noise | - | | | Built to meet EN55022-B, FCC-ClassB, VCCI-B | | |
| 32 | Weight (Typ) | g | | | 120 | | |
| 33 | Size (WxHxD) | mm | | | 50 x 21 x 105 | | |

=NOTES=

- *1. Operating time at peak output is less than 10 seconds. (Duty=0.35)
- *2. At 100VAC and maximum output current , Ta=25°C.
- *3. For cases where conformance to various safety specs (UL,CSA) are required, to be described as 100 - 240VAC, 50/60Hz on name plate.
- *4. From 85 - 265VAC and constant load.
- *5. From Min load - Full load (Maximum Power) and constant input voltage.
- *6. From -10 - +50°C constant input voltage and load.
- *7. Current limiting with automatic recovery.
Avoid to operate over load or dead short for 30 seconds.
- *8. Over voltage clamping by Zener Diode.
- *9. Refer to Instruction Manual.
- *10. Please refer to Fig A for measurement of line & load regulation and ripple voltage.
- *11. At standard mounting method, Fig B.

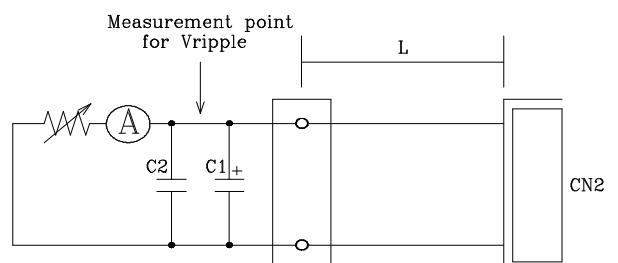


Fig.A L:150mm AWG#22
C1:Elec.Cap 100uF
C2:Film Cap 0.1uF
Bandwidth of scope:100MHz

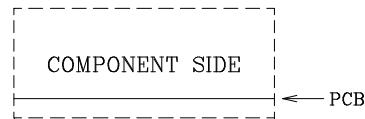


Fig.B

ZWS 10**OUTPUT DERATING**

A153-01-02

COOLING : CONVECTION COOLING

| Ta(°C) | LOAD(%) | | | | |
|----------|------------|------------|------------|------------|------------|
| | MOUNTING A | MOUNTING B | MOUNTING C | MOUNTING D | MOUNTING E |
| -10 ~+50 | 100 | 100 | 100 | 100 | 100 |
| 55 | 85 | 85 | 85 | 100 | 100 |
| 60 | 70 | 70 | 70 | 70 | 70 |

OUTPUT DERATING CURVE