

## SUMMARY

### # Wires

Low	0
High	0
Coax	1
Triax	0
Quad	0
Fiber	0
Fluidic	0

*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	0A
Termination type	Female solder
IP rating	50
Cable Ø	2.50 - 2.80 mm
Matching parts	FFA.0A.250.NTAC29Z
Status	
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	PCA*: Straight receptacle with cable collet and nut for fitting a bend relief
Keying	
Housing Material	Brass (nickel plated) shell, collet nut, latch sleeve and mid pieces
Cable Fixing	∅ 2.5 - 2.8 mm
Variant	Z : Nut for fitting a bend relief

### Performance

Configuration	0.25 : 1 Coax (50 Ohm)
Insulator	
Rated Current	

### Specifications

Contact Type:	Coaxial 50 Ohm (Solder)
Max. Matings:	1000


### Others

IP Rating:	50
------------	----

---

# DRAWINGS

## Draws

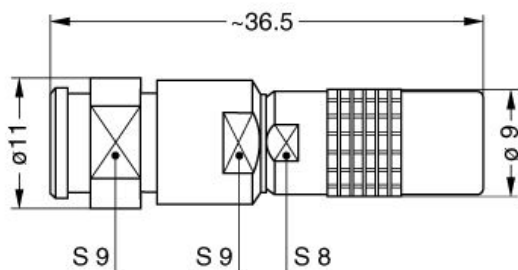

## Dimensions

	A	B	L	S1	S2	S3
mm.	9	11	36.5	8	9	9
in.	0,35	0,43	1,44	0,31	0,35	0,35

---

# RECOMMENDED BY LEMO

## Tools

None

## Cables