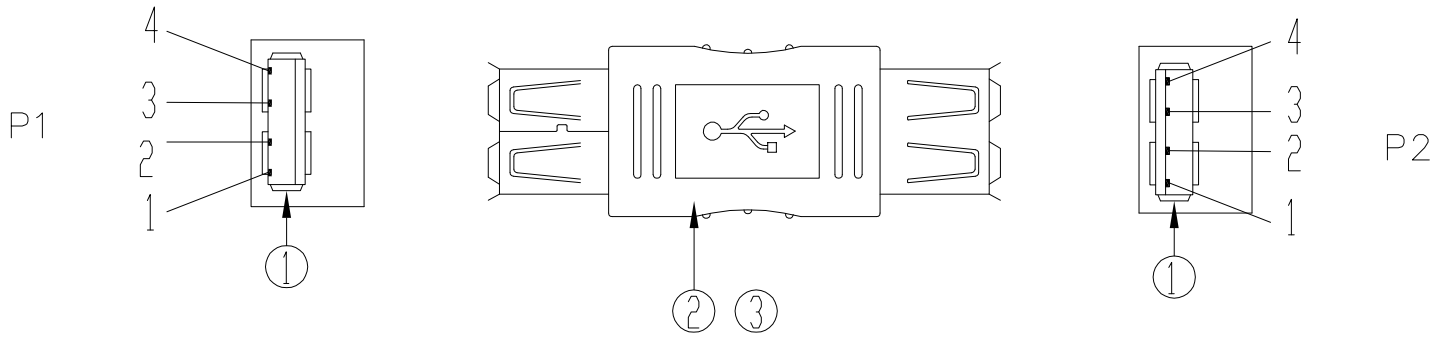

PIN ASSIGNMENT

P1	P2
1	1
2	2
3	3
4	4
SHEEL	SHEEL

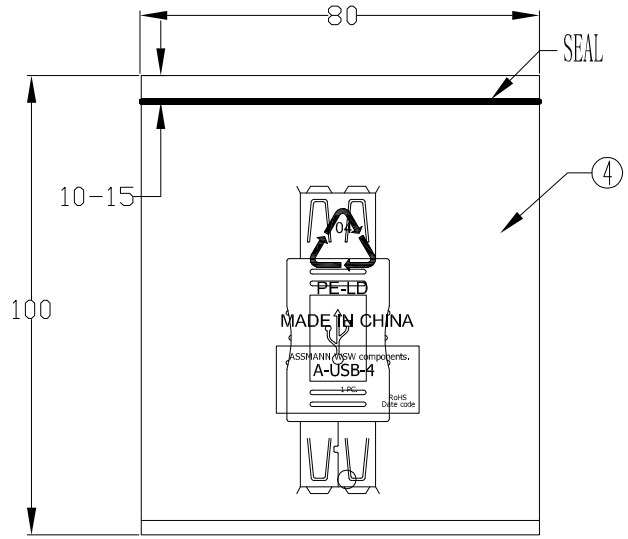

1PC/PE BAG

Electronic Test:
1.100% Test,(Open,Short,Miss Wire)
2.Contact Resistance:3 ohm max.
3.Insulation Resistance:20M ohm min.
4.Hi-Pot:300V DC/10ms

NO.	NAME	Q'TY	SPECIFICATION
⑤	PE BAG	1/10	CLEAR SIZE:170*250*0.05mm PRINT BLACK"MADE IN CHINA" +"10PCS".
④	PE BAG	1	CLEAR SIZE:80*100*0.05mm PRINT BLACK"MADE IN CHINA" +"1PC"
③	OUT JACKET	6g	BEIGE(IV-29) 40P PVC(WM-005)
	IN JACKET	4g	CLEAR LDPE
②	CABLE	5	UL1007 28AWG L=30MM
①	CONN	2	USB A FEMALE,SHELL NICKEL PIN GOLD FLASH SHORT BODY

RoHS compliant
Unit: mm

Scale	Free						Date	Name
TOLERANCE						Drawn	20.02.2017	Amy
						Approved	20.02.2017	Amy
DIM	TOL							
		⓪	Drawn	20.02.2017	Amy			
Angle	TOL	Id.	Modification	Date	Name			

Customer-No.

ASSMANN WSW-No. A-USB-4

Drawing-No. ASS 7877 CA

rev00

Replace

Sheet

ASSMANN wsw components