

SC-MATHSCON



Programmable Mathematics Unit



- **User Configurable Maths Function**
- **Two Isolated Inputs and One Isolated Output**
- **3-Port Isolation to 1000Vdc**
- **High Accuracy, Low Cost**
- **Ultra Compact, only 17.5mm Wide**
- **1 Universal & 1 Voltage/Current Input**

The SC-MATHSCON Isolating Signal Converter can be user-configured to carry out a wide range of mathematical functions on two isolated input channels. One input is a universal current, voltage, thermocouple or RTD input, and the other can be either voltage or current. Each channel can be multiplied by a factor or linearised and then any of the following functions can be performed on those input channels.

- Addition Output = A + B
- Subtraction Output = A - B
- Multiplication Output = A x B
- Division Output = A / B
- Square Root Output = $\sqrt{A-B}$

High Signal Select

Low Signal Select

Average of the two signals

The unit provides an isolated, scaleable current or voltage output corresponding to the result of the required function.

The power supply requirement is 16 to 32V dc.

General Specifications

The inputs types and ranges included below are our standard ones. Please contact our sales department for details on any application not specified below.

DC Current

0-20mA, 4-20mA, 0-10mA all into 10 Ω

DC Voltage

0-1V, 0-10V, 1-5V all into 1M Ω

RTD, Thermocouple and Potentiometer Inputs available on Input 1 only

Outputs

DC Current (Source or Sink) and Voltage

0-20mA, 4-20mA, 0-10mA into 750 Ω maximum.

0-1V, 0-10V, 1-5V into a minimum 100k Ω

Technical Specifications

Parameter	Min	Typ	Max	Comments
Supply Voltage	16V	24V	36V	
Supply Current (mA)		95	134	Max with transmitter supply
Input Impedance (Volt)		1M Ω		
Input impedance (mA)		15 Ω		
Volt Drop (mA Input)		0.3V		At 20mA input
Overall Accuracy		$\pm 0.01\%$	$\pm 0.05\%$	
Input Accuracy		$\pm 0.01\%$		
Temp Coefficient			$\pm 50\text{ppm}/^\circ\text{C}$	
Load Resistance Error			$\pm 5\text{ppm}/\Omega$	0 < RL < 750 Ω
Time Constant (10-90%)		100mS	180mS	See note
Operating Ambient	0 $^\circ\text{C}$		55 $^\circ\text{C}$	
Relative Humidity	0%		90%	
Isolation Voltage	1kV			
Surge Voltage	2.5kV for 50 μS		Transient of 10kV/ μS	

Notes

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur.

Device is protected against reverse polarity connection.

Accuracy figures based on an ambient temperature of 20 $^\circ\text{C}$.

The Time Constant is dependent on which processing options are been selected.

Installation Data

Mounting	DIN Rail TS35
Orientation	Any
Connections	Screw Clamp with pressure plate
Conductor Size	0.5-4.0mm
Insulation Stripping	12mm
Weight	Approx 95g

Max tTerminal Torque 0.4Nm

Ordering Information


Part No.: SC-MATHSCON

Cynergy3 Components Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE
Telephone +44 (0) 1202 897969
Email:sales@cynergy3.com

ISO9001CERTIFIED

SC-MATHSCON 2017

© 2017 Cynergy3 Components, All Rights Reserved. Specifications are subject to change without prior notice. Cynergy3 Components and the Cynergy3 Components logo are trademarks of Cynergy3 Components Limited.

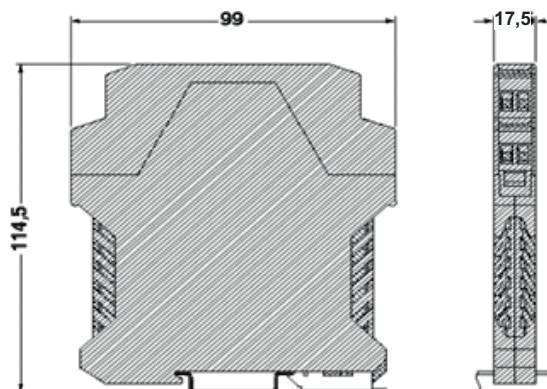

Connection Details

1. Power Input -ve
2. Power Input +ve
12. Input 2 (mA, V)+ve
10. Input 2 -ve
3. Tx supply +ve RTD 4 th wire
6. RTD 3 rd wire
5. Input 1 (ma, V, T $^\circ\text{C}$, RTD) +ve
4. Input 1 -ve
7. Output -ve
9. Output (mA, V) +ve



Made in the UK

www.cynergy3.com