



51.5 (W) x 30.5 (H) x 115 (L) mm

DPS-40AB-11

FEATURES

- Total Power 39.96W, Peak 61.2W for 5sec.
- 90-264Vac Auto Range Input
- Efficiency : Meet DoE Level VI
- High Reliability : > 100,000 Hours @ 100Vac/Full Load (25 °C)
- Protection : Short / Over-current / Over-voltage / Over-temperature
- Safety : CE/ FCC/ CB/ TUV-S/ TUV-GS/ UL/CUL/ CCC/ BSMI/ RCM/ KC/ KCC(MEPS)/ NRcan/ AU-MEPS/ PSE, meet CCC tropical standard.
- EMI : CLASS B



Input	Voltage Range	90~264Vac Auto Range
	Frequency	47~63Hz
	Efficiency	The average efficiency at 25%, 50%, 75% and 100% load \geq 87.6%
	Input Current	100Vac/12V/3.33A load 1.2A 240Vac/12V/3.33A load 0.6A
Output	12V	0A ~ 3.33A
Protection	Over-current	Auto Recovery
	Over-temperature	Auto Recovery
	Short	Auto Recovery
	Over-voltage	Auto Recovery
Environment	Operating Temp.	0 to 40°C (Refer the Power de-rating curve) The PSU should turn on at -30 °C @ Rated Input Voltage
	Storage Temp.	-20 to 70 °C
	Operating Humidity	20% - 85%
	Storage Humidity	5% - 95%



DELTA 電子株式会社



최저소비효율기준 만족 제품
KCC
최유경원장치 AC/DC ADAPTER
SU10529-15011
MS/IP-REM-DVP-DPS-40AB-11
Mfr. Name: Delta Electronics Power (Dongguan) Co., Ltd.
A/S Center: (82)2-515-5303



DELTA ELECTRONICS, INC.
3, TUNG YUAN ROAD, CHUNGLI
INDUSTRIAL ZONE
TAOYUAN SHIEH, TAIWAN, R.O.C.
TEL: 886-3-4526107
FAX: 886-3-4527314
mail: powersales@delta.com.tw

DELTA PRODUCTS CORPORATION
4405 CUSHING PARKWAY
FREMONT, CA 94538, U.S.A.
TEL: 1-510-668-5100
FAX: 1-510-668-0680

DELTA ELECTRONICS(JAPAN) INC.
DELTA SHIBADAIMON BLDG.
2-1-14 SHIBADAIMON, MINATO-KU,
TOKYO, 105-0012, JAPAN
TEL: 81-3-5733-1111
FAX: 81-3-5733-1211

DELTA ELECTRONICS, EUROPE LTD.
2 YOUNG PLACE KELVIN
INDUSTRIAL ESTATE EAST KILBROIDE,
GLASGOW G75 0TD, U.K.
TEL: 44-1355-588888
FAX: 44-1355-588889

The ambient temperature shown as Fig.1.


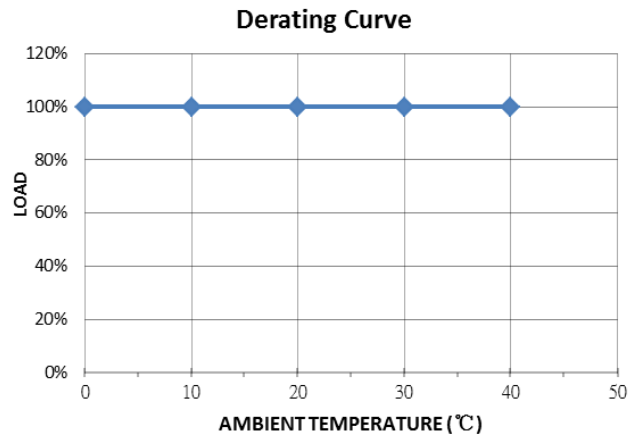


Figure1. Power de-rating curve of ambient temperature

Size : (L x W x H)	115*51.5*30.5 mm
AC Input Connector	C14
DC Output Connector	TUNING FORK PLUG(2.1*5.5)

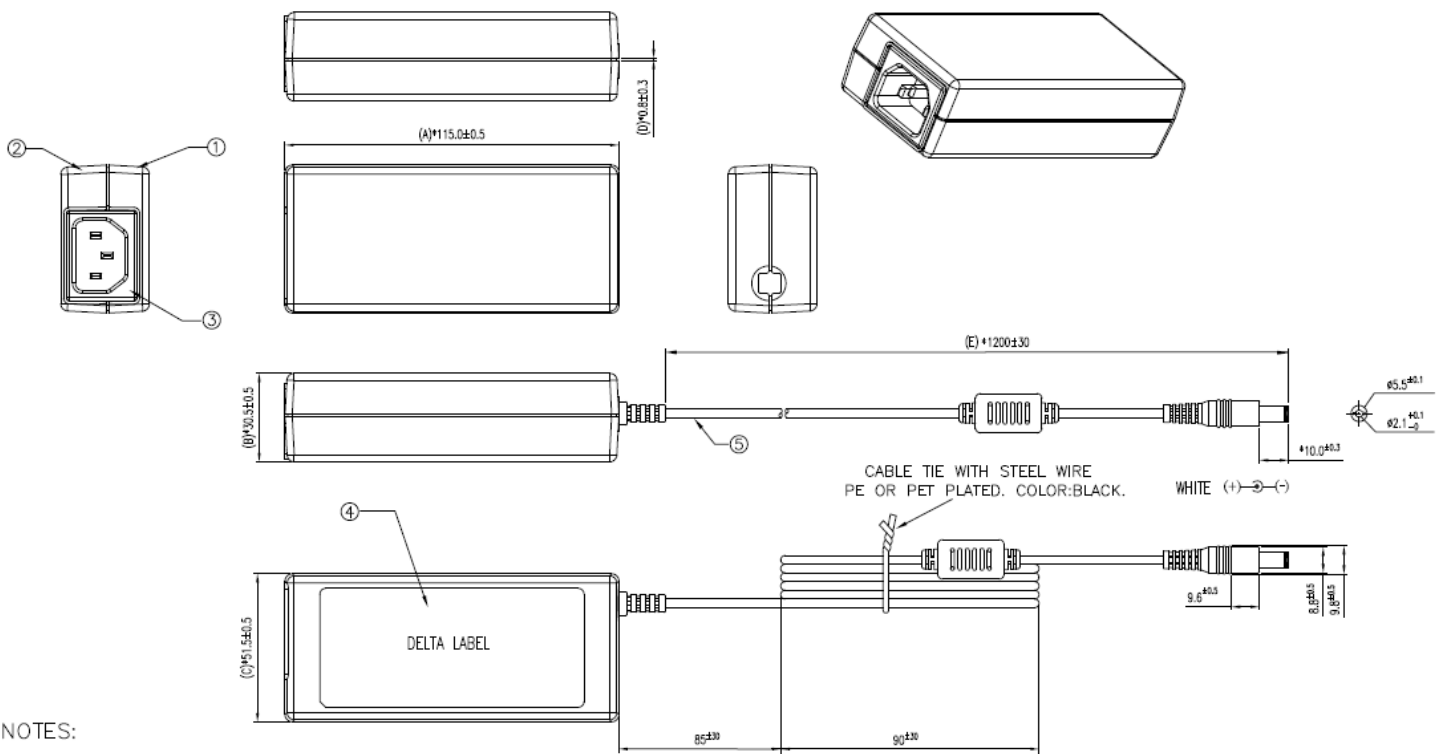

NOTES:

1.

ITEM	PART NAME	COLOR
①	COVER	BLACK
②	CHASSIS	BLACK
③	SOCKET ASS'Y	BLACK
④	DELTA LABEL	BLACK
⑤	POWER CORD	BLACK

2. "*" IS CRITICAL DIM WHICH MUST BE MEASURED.