


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
WAR NR. 3-88-9833-0			4	REVISED PER ECO-09-023313	13OCT09	-	AEG
PASSEND ZU PROJ.-NR. E 90-52554			5	ECR-10-001372	10MAR10	-	RK
			6	ECR-10-026307	13JAN11	KK	HMR

POLZ. PRO REIHE	L±0.4	BESTELL-NR.	
-	-	-	-
2	5.08	2	△
3	7.62	3	△
4	10.16	4	△
5	12.70	5	△
6	15.24	6	△
7	17.78	7	△
8	20.32	8	△
9	22.86	9	△
10	25.40	1-	-0
11	27.94	1	1
12	30.48	1	2
13	33.02	1	3
14	35.56	1	4
15	38.10	1-	-5
16	40.64	1-	-6
17	43.18	1	7
18	45.72	1	8
19	48.26	1	9
20	50.80	2-	-0
21	53.34	2	1
22	55.88	2	2
23	58.42	2	3
24	60.96	2	4
25	63.50	2	5
26	66.04	2-	-6
27	68.58	2	7
28	71.12	2	8
29	73.66	2	9
30	76.20	3-	829587-0
31	78.74	3	1
32	81.28	3	2
33	83.82	3	3
34	86.36	3	4
35	88.90	3	5
36	91.44	3	6
37	93.98	3	7
38	96.52	3	8
39	99.06	3	9
40	101.60	4	0
41	104.14	4	1
42	106.68	4	2
43	109.22	4	3
44	111.76	4	4
45	114.30	4	5
46	116.84	4	6
47	119.38	4	7
48	121.92	4	8
49	124.46	4	9
50	127.00	5-	-0

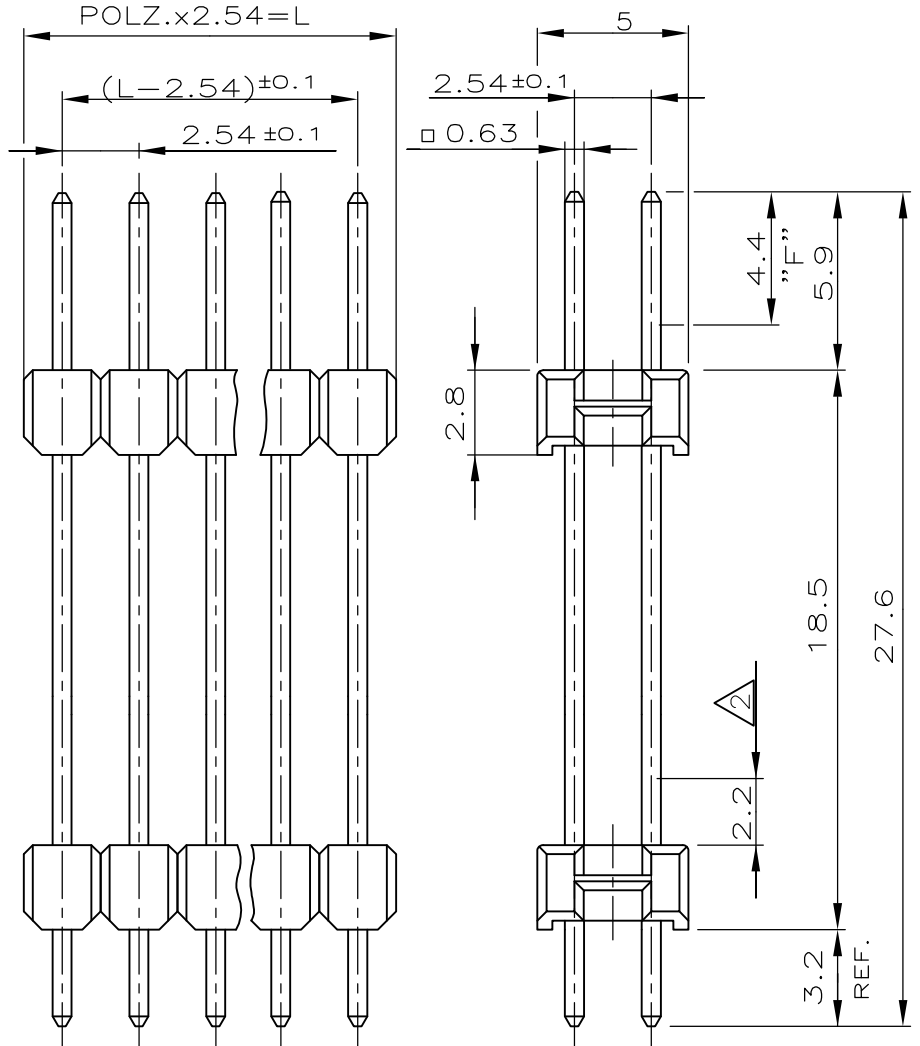

- △ OBSOLETE
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- △ STIFTE IN DIESEM BEREICH TEILWEISE BLANK
- △ STECKSEITE:IM BEREICH "F" 0.8 µm GOLD ÜBER 1.27 µm Ni
LÖTSEITE: MIN. 2.5 µm ZINN ÜBER 1.27 µm Ni

KONTAKT	Cu Sn	△
STIFTGEHÄUSE	PBTP GV	GRÜN
BENENNUNG	WERKSTOFF	OBERFLÄCHE FARBE

ZEICHNUNG GÜLTIG AB KW 6/93

DIMENSIONS: mm	DWN	A.HO	17.04.90	MATERIAL	-	FINISH	-
	CHK	M.SCHAARSCHMIDT	-	TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2 mm	APVD	-	-				
0 PLC ± -	PRODUCT SPEC	-	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
1 PLC ± -	APPLICATION SPEC	-	-	A4	00779	C-829587	-
2 PLC ± -	WEIGHT	-	-	CUSTOMER DRAWING			SCALE
3 PLC ± -							4:1
4 PLC ± -							SHEET
ANGLES ± -							1 OF 1
							REV
							6