



Smart Technology. Delivered.

VERTICALLY POLARIZED OMNI ANTENNAS OD24-7D5



2400-2485 MHZ VERTICALLY POLARIZED OMNI-DIRECTIONAL ANTENNA

The omni-directional antenna systems offered by Laird are constructed of UV-stable fiberglass with all stainless steel brackets standard. They come standard with type N female bulkhead connectors with extra heavy duty nuts for optional standoff type mounting. The 7dBi has a 5 deg electrical downtilt standard which is perfect for close-in wireless systems such as apartment complexes. Because of their unique high performance design which eliminates nulls, they can be used in a wide variety of wireless systems.

FEATURES


- 7 dBi antenna gain
- 5 Deg electrical downtilt
- Type N female integrated bulkhead connector
- Rugged, lightweight, and waterproof

MARKETS

- 2.4 GHz ISM band applications
- Base station antennas
- 802.11b and 802.11g wireless systems
- Point-to-multi-point systems
- Wireless broadband systems
- WiFi access points

PARAMETER	
Frequency range	2400-2485 MHz
Input return loss (S11)	-14 dB
VSWR	1.5:1
Impedance	50 ohm
Input power	100W
Pole diameter (OD)	1" - 2" (25-51mm)
Operating temperature	-40 - +70°C
Rated wind velocity	125 mph (56 m/sec)
Gain	7dBi
Vertical 3dB beamwidth	18°
Electrical downtilt	5°
Weight	1.1 lbs (0.5kg)
Length +/- 1.0 in	21 in (54 cm)
Diameter	1.5 in (38 mm)

ANTENNA PATTERN

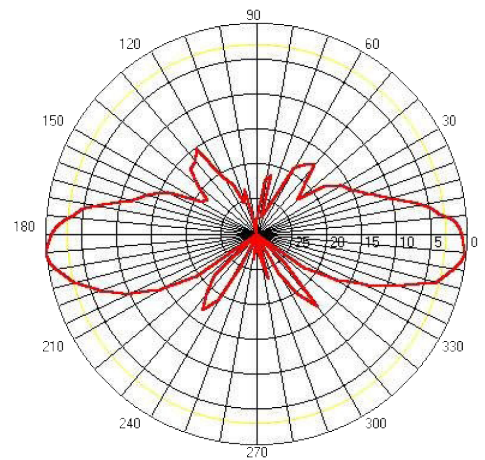

SYSTEM ORDERING

OD24-7D5 2.4GHz 7dBi omni-directional antenna with 5 deg electrical downtilt



ANT-DS-OD24-7_0115

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trade marks or registered trade marks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

Americas: +1.847.839.6907
 IAS-AmericasEastSales@lairdtech.com
 Europe: +44.1628.858941
 IAS-EUSales@lairdtech.com
 Asia: +86.21.5855.0827.127
 IAS-AsiaSales@lairdtech.com
 www.lairdtech.com