


**PACKAGE: INDIVIDUAL PE BAG.**

**6P6C 50U"**

**6P6C 50U"**

**500g Weight**

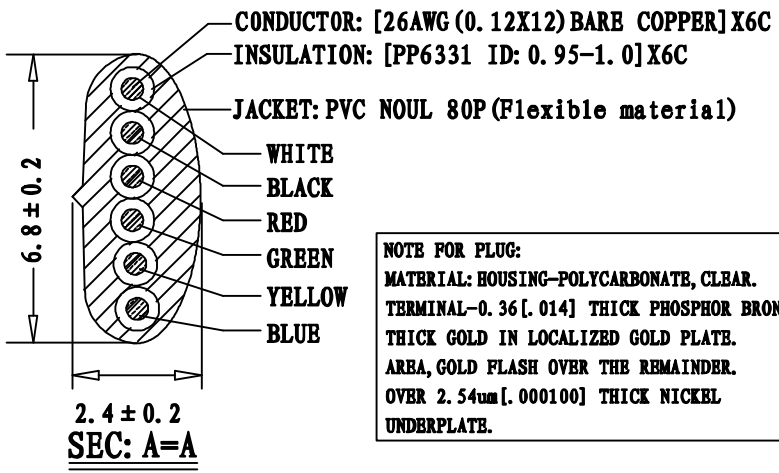

**CONDUCTOR: [26AWG (0.12X12) BARE COPPER] X6C**  
**INSULATION: [PP6331 ID: 0.95-1.0] X6C**  
**JACKET: PVC NOUL 80P (Flexible material)**

**NOTE FOR PLUG:**  
**MATERIAL: HOUSING-POLYCARBONATE, CLEAR.**  
**TERMINAL-0.36 [.014] THICK PHOSPHOR BRONZE.**  
**THICK GOLD IN LOCALIZED GOLD PLATE.**  
**ARBA, GOLD FLASH OVER THE REMAINDER.**  
**OVER 2.54um [.000100] THICK NICKEL**  
**UNDERPLATE.**

P1	P2
1 WHITE	1
2 BLACK	2
3 RED	3
4 GREEN	4
5 YELLOW	5
6 BLUE	6

PART NO	DRAWING NO	BUYER COLOR	VENDOR COLOR	RETRACTED LENGTH ("L3")	CUSTOMER Accepted ("L2")	CUT LENGTH "L1"
522-26-6600-BL-0005F	A	Black	BLACK LIGHT	540 ± 50	5.0FT-5.75FT	2600-2700
522-26-6600-BL-0007F	B	Black	BLACK LIGHT	740 ± 50	7.0FT-8.05FT	3700-3900
522-26-6600-BL-0010F	C	Black	BLACK LIGHT	1000 ± 50	10.0FT-11.5FT	5000-5200
522-26-6600-BL-0012F	D	Black	BLACK LIGHT	1300 ± 50	12.0FT-13.8FT	6400-6600
522-26-6600-BL-0014F	E	Black	BLACK LIGHT	1350 ± 50	14.0FT-16.1FT	6900-7100
522-26-6600-BL-0025F	F	Black	BLACK LIGHT	3400 ± 50	25.0FT-28.75FT	13200-13400

REVISE	VERSION	BASIS	CONTENTS
12-02-20	A/0	T0210A	NEW DRAWING

CnC Tech, LLC	
Industrial Cable and Connector Technology	
IDRAWING NO: 671-329	CUSTOMER: L-671
ITEM NO: 6C COILD CORD P+P PLUG	UNIT: mm
DATE: 2012-02-20	ISSUE: (A/0)
DRAWN:                      QE:                      QA:	
SALES DEPT:                      SALES MANAGER:	